



Very Well Connected™

INSTALLATION INSTRUCTIONS


<u>Product</u> 7160-0791 GETAC S410 CRADLE	<u>Revision</u> Rev. B	<u>Form</u> INST-725 Printing Spec: PS-001
---	----------------------------------	--

This instruction sheet is for the Getac S410 cradle only. For instructions on features, set-up, and operation of the S410 computer, please refer to the manual provided by Getac with the computer.

This cradle is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

- Item No. 7160-0791-00**
- Item No. 7160-0791-03**

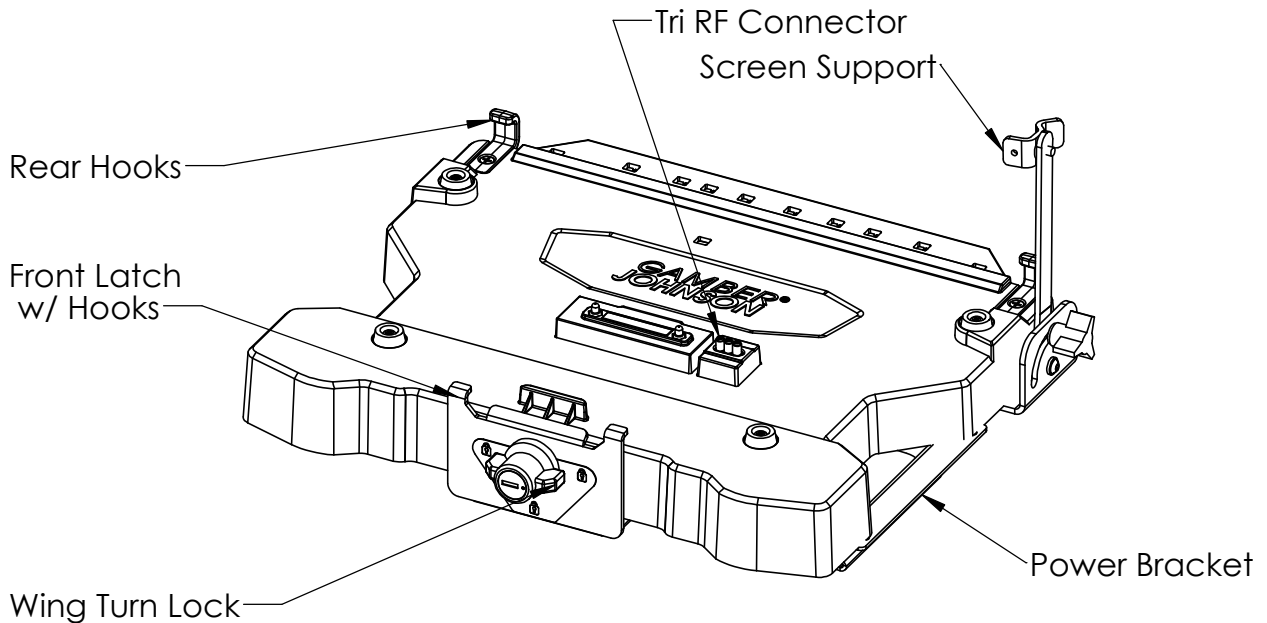

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2015 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

CONNECTING EXTERNAL POWER SUPPLY AND MOTION ATTACHMENT

Connect power wire to 12Vdc Vehicle power

Motion Attachment attached with (4) .25-20 hex head bolts & washers included in hardware bag

Attach Power Supply with mounting bracket using #10-32 screws

Attach Screen Support (7110-1206) here or on opposite side



UNIVERSAL ADAPTER

(attach this before attaching the power supply)

Replace washer head bolts with hex head bolts supplied in hardware bag

Attach Universal Adapter to dock with side flange toward power supply as shown

Attach Universal Adapter to dock with (4) .25-20 hex head bolts & washers (included in the Dock Hardware bag)



SCREEN SUPPORT ACCESSORY

A Screen Support (7110-1206), included in box, could be installed on either side of the dock using provided hardware. This is recommended for installations in environments with high vibration.

NOTE: Using Screen Support on the driver side would restrict the access to laptop's stylus

DOCKING THE COMPUTER

TO DOCK THE COMPUTER

1. Insert the back of the S410 computer such that the rear hooks enter the rear pockets of the laptop
2. Lower the front of the computer down on the cradle
3. **Lightly press down on the front of the computer to ensure it is fully seated** while closing the latch.
4. With front hooks latched into the computer, turn the lock to "LOCK" position.



TO UNDOCK THE COMPUTER

1. Turn the lock to "UNLOCK" position. **Lightly press down on the front of the computer** and pull the latch outward.
2. Lift the front of the computer off the cradle.
3. Pull the back of the computer out from the rear hooks.

